

## HELICAL ISOLATORS


# HM10062 Series



### 1/16" DIA CABLE

EVANS Part Number	Dimensions(in.)		Compression		Shear & Roll		45° Compression/Roll	
	H	O.D.	Avg. Rate(lb/in)	Max Deflection(in)	Avg. Rate(lb/in)	Max Deflection(in)	Avg. Rate(lb/in)	Max Deflection(in)
HM10062-1	0.7	1.0	99	0.3	69	0.3	37	0.6
HM10062-2	0.8	1.1	65	0.4	54	0.4	23	0.7
HM10062-3	1.0	1.2	36	0.5	48	0.6	11	0.8
HM10062-4	1.1	1.3	25	0.6	32	0.7	8	0.9
HM10062-5	1.2	1.4	18	0.7	24	0.8	5	1.0
HM10062-6	1.3	1.5	14	0.8	21	0.9	4	1.1



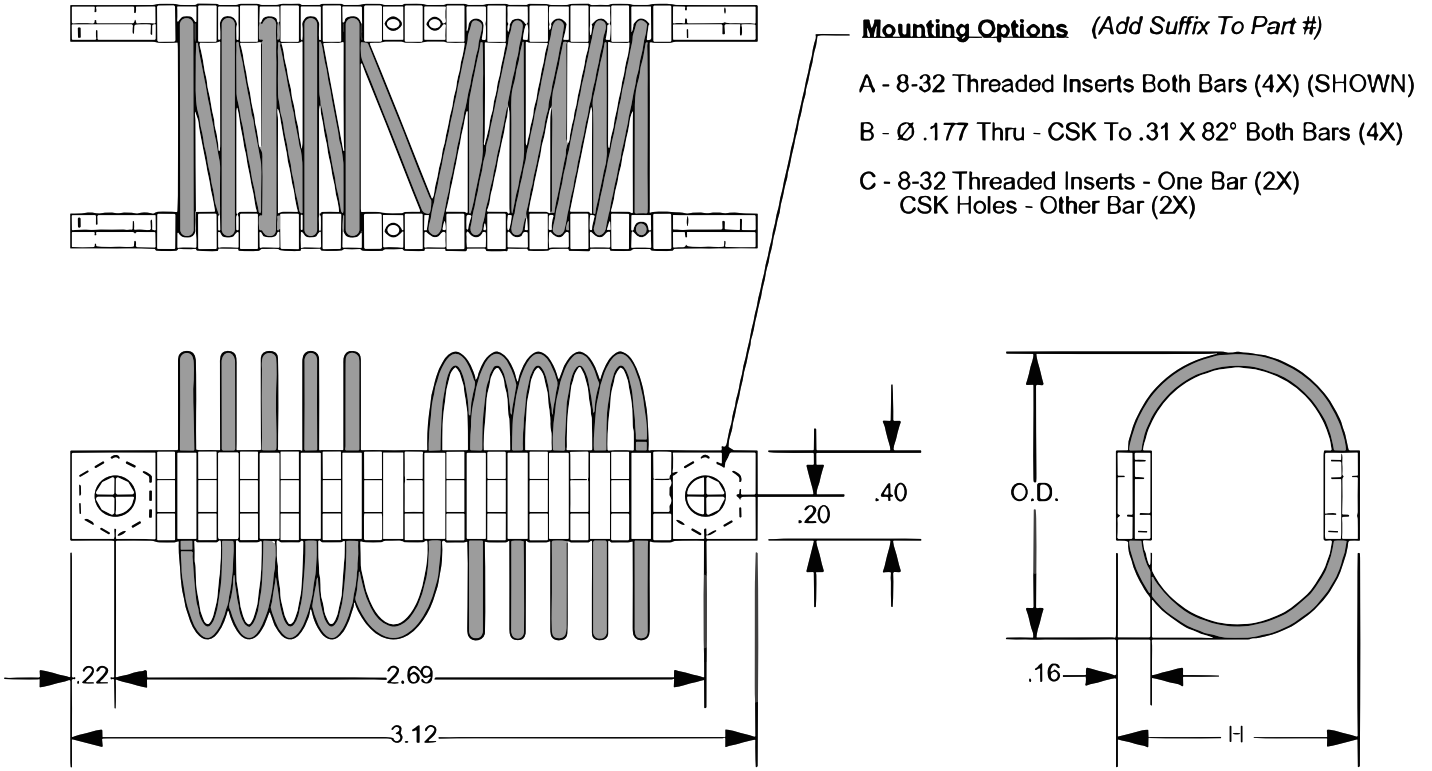


**REVISION3  
REDRAWN NOVEMBER18,1997**

## Specifications

<b>Cable</b>	Stainless Steel per MIL-W-83420
<b>Retaining bars</b>	Aluminum Alloy-6061-T6-Iridited per MIL-C-5541
<b>Retaining clips</b>	Stainless Steel

## HM10062 SERIES

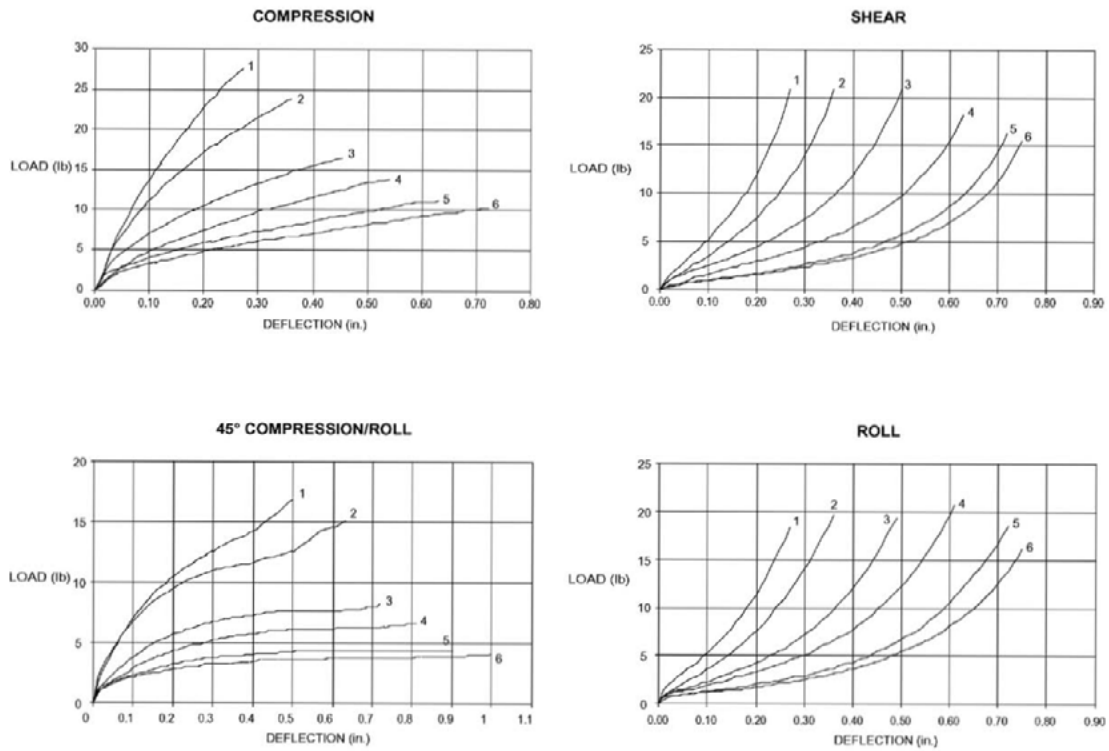

# Contact John Evans' Sons Today

Our experts offer a depth of expertise to assist you with all parts of the process. We are ready to answer your questions in a timely manner and will help you define what you need. We produce custom springs for all purposes, and we are here to work with you on any of your customization needs. [Contact us today.](#)